



## Crystal Oscillator Specifications


Unit Name	Crystal Oscillator
Part Name	OSC-O75BY
Date	November 8, 2005

Written by	Checked by	Approved by



Systron Inc.  
1274 - 3<sup>rd</sup> Avenue South  
Lethbridge, Alberta  
T1J 0J9 Canada

Phone: (403) 327-1444  
Fax: (403) 327-1480  
e-mail: sales@systroninc.com



**Description:**

Automatic mounting with ultra miniature leadless package. Guaranteed operating range between 3.3 to 5v power supply voltage 1.8v, 2.5v option.


**Character:**

High electromagnetic susceptibility and high reliability is assured due to seam sealing. Built-in C-MOS IC with tri-state function.

**Specifications**

Frequency range(MHz)	1.0~37MHz	33~50MHz	50~70MHz	70~133MHz
Frequency stability	±25.±50.±100.			
Operating temperature	-20°C~70°C,or specify.			
Storage temperature	-55°C~125°C			
Supply Voltage(VDD)	3.3V 5.0V	3.3V 5.0V	3.3V 5.0V	3.3V 5.0V
Input Current(ICC)	12mA 20mA	25mA 45mA	35mA 50mA	60mA 100mA
Output Load Capacitance	15pF(Standard)			
Rise & Fall Times	10ns Max.			
Symmetry	40%~60%		45%~55%	
Aging (at 25°)	3ppm/year Maximum			

**Marking and Dimensions (mm)**

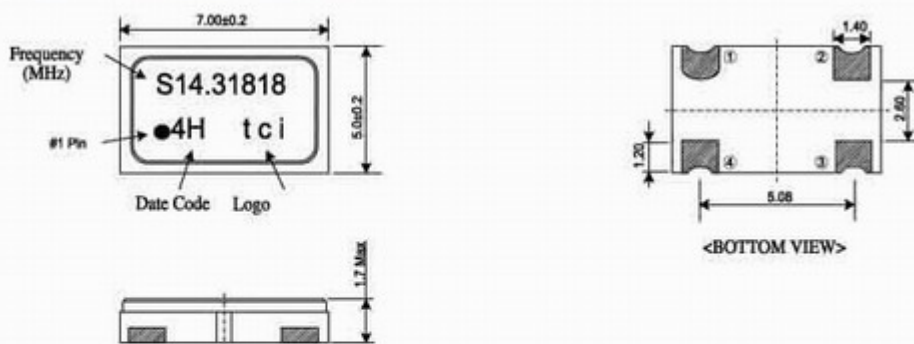

**Measurement Circuit**

